



A Donaldson Company

A WORLD LEADER IN FUME
EXTRACTION TECHNOLOGY

3D PrintPRO 4

Last Updated on 08.04.2021



For large enclosed 3D printers

The BOFA 3D PrintPRO 4 provides a high fume extraction and filtration rate when connected to a large enclosed 3D printer via its extraction take off point. The system can also return the ultra clean, filtered air either back to the printer enclosure for a cleaner print area or to the operator's breathing zone.

The BOFA 3D PrintPRO 4 combines high flow rate with speed control within a compact free standing unit.

Technology



DeepPleat pre-filter



HEPA filter



Reverse flow air (RFA) technology



Advanced carbon filter (ACF) technology



ProTECT service plan



SureCHECK quality standard

Key features of the 3D PrintPRO 4

Digital speed control
Standard

3 level filtration - Pre and HEPA/chemical filters
Standard

Low noise level
Standard

Small footprint
Standard

CE approvals
Standard

Filter signal
Optional

Filter change indicator
Standard

Hose kit included
Standard

Powder coated for durability
Standard

Compact size
Standard

24V remote stop/ start interface
Optional


Contact BOFA at <https://bofainternational.com/en/contact/>

https://bofainternational.com/en/?post_type=bofa_datasheet&p=5066



Technical specification

1. Filter change indicator
2. On / Off switch
3. Digital speed control
4. Power cable inlet
5. Hose inlet connections - 50mm
6. Exhaust outlet - 50mm
7. Door latches
8. Door hinges
9. Castors
10. Motor cooling inlet


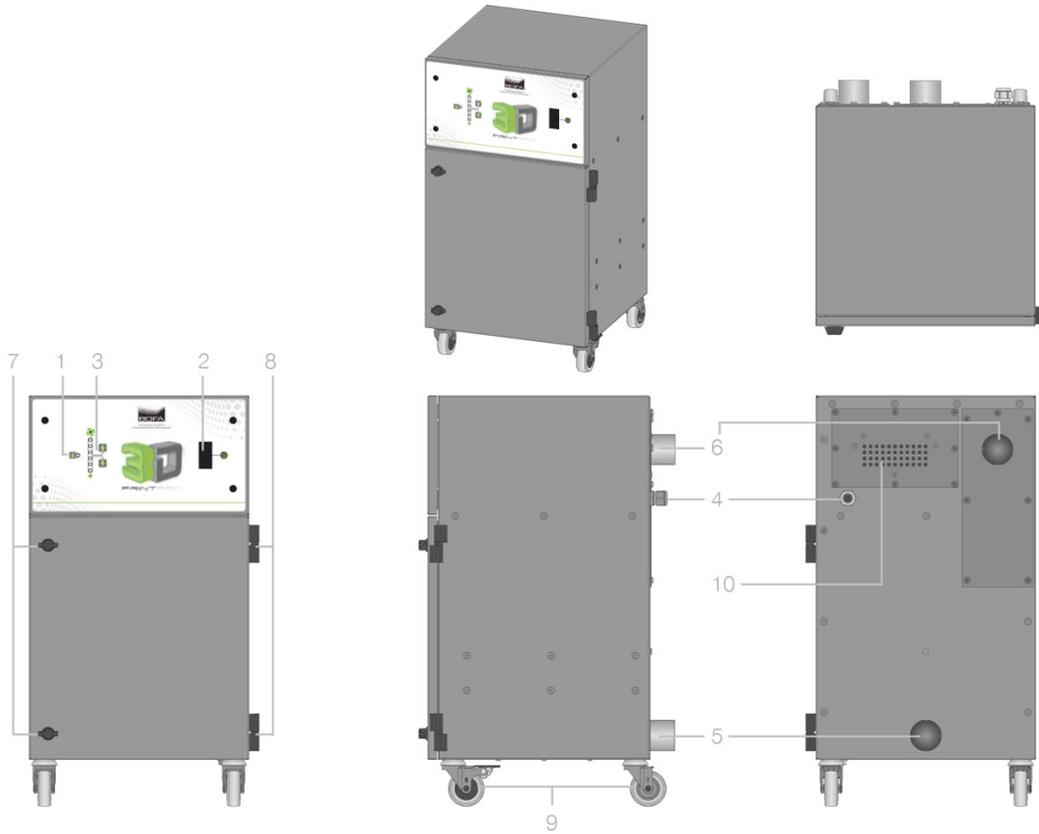


Hose kit specification

1. 50mm cuff x 2
2. 50mm x 1.5m flexible hose



Airflow through filters

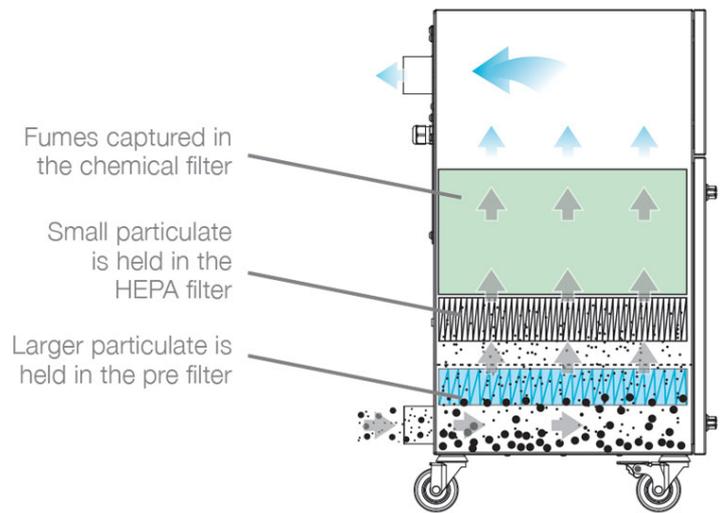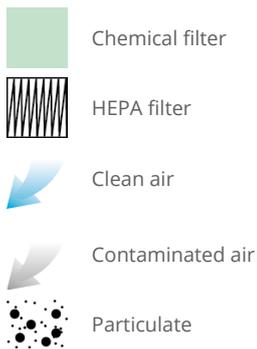

Technical data

	EU	US
Dimensions (HxWxD)	625 x 385 x 525	24.60 x 15.16 x 20.67"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Airflow / pressure	380m3/hr	224cfm
Electrical data	230v Single-phase 1~ 50/60Hz Full load current: 1.0amps	115v 60/50Hz Full load current: 1.1amps
Noise level	< 68dBA (at typical operating speed)	< 68dBA (at typical operating speed)
Weight	32kgs	70lbs
Approvals	UKCA and CE	UL

DeepPleat pre-filter specifications

Surface media area	1.74m ² approx (18.7ft ²)
Filter media	Borosilicate
Filter media construction	50mm maxi fold construction with glue bead spacers
Filter efficiency	95% @ 0.9 microns

Combined HEPA / Gas filter specifications

HEPA filter media	Borosilicate
HEPA media construction	50mm maxi fold construction with glue bead spacers
Filter housing	Zintec mild steel
Treated activated carbon	6.75kgs (14.85 lbs)
Filter efficiency	99.997% @ 0.3 microns

Unit part numbers

Model	Voltage	Part no.	Options
3D PrintPRO 4 Powder coated	230V	L5644	24v Stop/Start

Unit part numbers

3D PrintPRO 4 Powder coated	115V	L5645	A2001
-----------------------------	------	-------	-------

Replacement filter part numbers

Model	Pre-filter	Combined HEPA / Gas filter
3D PrintPRO 4	A1030390	A1030391

* Tested to UL and cUL standards, but testing may be provided by alternate nationally recognised test laboratories. Certain product configurations may affect the UL certification. Please speak to your sales representative.

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

